

COMP1531



Full-Stack - HTTP Servers

Lecture 4.2

Author(s): Hayden Smith



[\(Download as PDF\)](#)


In This Lecture

- Why? 🤔
 - Web servers are fundamental part of web-based full-stack software
- What? 📰
 - Networks
 - Express Server
 - APIs
 - Crud



Networks

- **Network:** A group of interconnected computers that can communicate
- **Internet:** A global infrastructure for networking computers around the entire world together
- **World Wide Web:** A system of documents and resources linked together, accessible via URLs

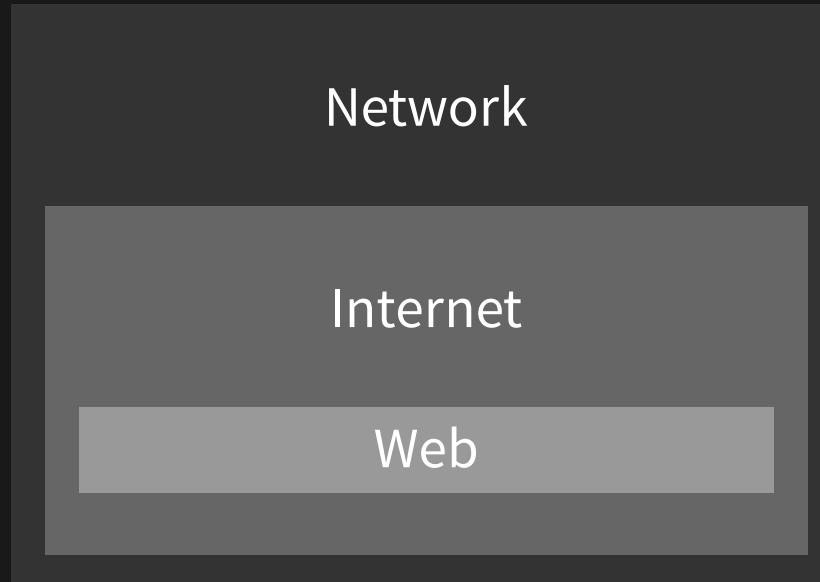



Networks

If you want to learn more about networking, go and study COMP3331.



Network Protocols

- Communication over networks must have a certain "structure" so everyone can understand.
- Humans do this all the time - waving, handshakes, clapping. Standard operation procedure that structures how we share info.
- Different "structures" (protocols) are used for different types of communication.




Network Protocols

Astrit Krasniqi CCNA/CCNP Certified Instructor – CCNA Cyber Ops, Chapter 4: Network Protocols and Services

TCP/IP Protocol Suite and Communication

TCP/IP Protocol Suite and Communication Process

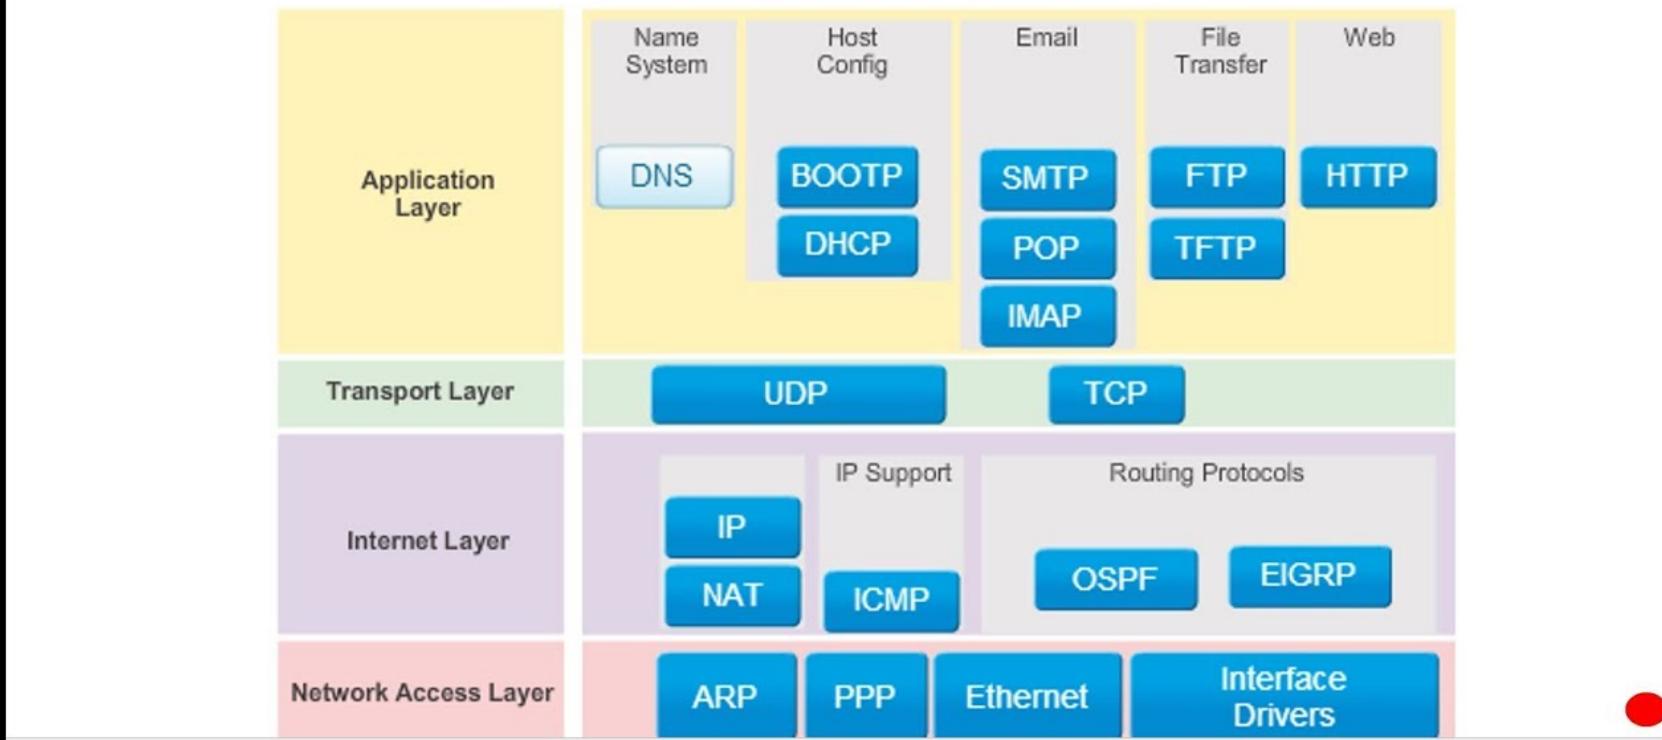

source

HTTP is an example of one of the protocols. It is the protocol of the web. The primary protocol you use to access URLs in your web browser.



Network Protocols

Examples

The image displays four windows illustrating various network protocols:

- FileZilla**: A file transfer application showing the local site (C:\Users\smith\OneDrive\Documents\Adobe) and remote site (hosted on a server). It includes a toolbar with icons for file operations like upload, download, and search.
- Thunderbird**: An email client window titled "Write: (no subject) - Thunderbird". It shows the "From:" field set to "Hayden Smith <z3418003@ad.unsw.edu.au>". The "To:", "Subject:", and "Text" fields are empty. Below the text area, there are "Paragraph" and "Variable Width" dropdown menus, along with a rich text editor toolbar.
- Putty Configuration**: A configuration dialog for the PuTTY terminal emulator. The "Category" tree on the left includes Session, Terminal, Window, Connection, and SSH. The "Logging" option under Session is selected. The right panel contains settings for session logging, including options for "None", "Printable output", "All session output", "SSH packets", and "SSH packets and raw data". It also specifies a log file name ("putty.log") and what to do if the log file already exists ("Always overwrite it", "Always append to the end of it", "Ask the user every time", and "Flush log file frequently").

Text Content (Visible in Thunderbird and Putty):

--
Hayden Smith ([LinkedIn](#))

Lecturer-in-charge COMP1531
School of Computer Science and Engineering
UNSW Sydney



HTTP: Hypertext Transfer Protocol

I.E. Protocol for sending and receiving HTML documents (nowadays much more)

Web Browsers (Client)

Web Servers



Web browsers are applications to request and receive HTTP.



NodeJS Express Server

A very popular npm library exists to allow you to run your own HTTP server with NodeJS.
It's called [Express Server](#).



NodeJS Express Server

```
1 import express from 'express';
2
3 const app = express();
4 const port = 3000;
5
6 app.use(express.text());
7
8 app.get('/potatotheory', (req, res) => {
9   const name = req.query.name;
10  res.json({
11    "message": `Hi ${name}`,
12  });
13 });
14
15 app.post('/yuchao', (req, res) => {
16  res.json({
17    name: 'Yuchao!',
18  });
19 });
20
21 app.listen(port, () => {
22   console.log(`Listening on port ${port}`);
23 });
```



NodeJS Express Server

```
1 import express from 'express';
2
3 const app = express();
4 const port = 3000;
5
6 app.use(express.text());
7
8 app.get('/potatotheory', (req, res) => {
9   const name = req.query.name;
10  res.json({
11    "message": `Hi ${name}`,
12  });
13 });
14
15 app.post('/yuchao', (req, res) => {
16  res.json({
17    name: 'Yuchao!',
18  });
19 });
20
21 app.listen(port, () => {
22   console.log(`Listening on port ${port}`);
23 });
```

This is us importing the express library



NodeJS Express Server

```
1 import express from 'express';
2
3 const app = express();
4 const port = 3000;
5
6 app.use(express.text());
7
8 app.get('/potatotheory', (req, res) => {
9   const name = req.query.name;
10  res.json({
11    "message": `Hi ${name}`,
12  });
13 });
14
15 app.post('/yuchao', (req, res) => {
16  res.json({
17    name: 'Yuchao!',
18  });
19 });
20
21 app.listen(port, () => {
22   console.log(`Listening on port ${port}`);
23 });
```

This creates an instance of a server, and we define the network port to run on.

A port is essentially one of the roads in and out of a computer's network. There are often 65,000-ish.



NodeJS Express Server

```
1 import express from 'express';
2
3 const app = express();
4 const port = 3000;
5
6 app.use(express.text());
7
8 app.get('/potatotheory', (req, res) => {
9   const name = req.query.name;
10  res.json({
11    "message": `Hi ${name}`,
12  });
13 });
14
15 app.post('/yuchao', (req, res) => {
16  res.json({
17    name: 'Yuchao!',
18  });
19 });
20
21 app.listen(port, () => {
22   console.log(`Listening on port ${port}`);
23 });
```

This line is a quirk of express that is required in order for the data of many requests to be interpreted.



NodeJS Express Server

```
1 import express from 'express';
2
3 const app = express();
4 const port = 3000;
5
6 app.use(express.text());
7
8 app.get('/potatotheory', (req, res) => {
9   const name = req.query.name;
10  res.json({
11    "message": `Hi ${name}`,
12  });
13 });
14
15 app.post('/yuchao', (req, res) => {
16  res.json({
17    name: 'Yuchao!',
18  });
19 });
20
21 app.listen(port, () => {
22   console.log(`Listening on port ${port}`);
23 });
```

This says that "when URL / is accessed, call this function". The function sends some text to the person accessing that URL.

If we want our server to do more, we need to write lots more of these.



NodeJS Express Server

```
1 import express from 'express';
2
3 const app = express();
4 const port = 3000;
5
6 app.use(express.text());
7
8 app.get('/potatotheory', (req, res) => {
9   const name = req.query.name;
10  res.json({
11    "message": `Hi ${name}`,
12  });
13 });
14
15 app.post('/yuchao', (req, res) => {
16  res.json({
17    name: 'Yuchao!',
18  });
19 });
20
21 app.listen(port, () => {
22   console.log(`Listening on port ${port}`);
23 });
```

This line actually starts the server (on a particular port). It essentially runs an infinite loop so the program runs forever constantly waiting for new people to "access" it via a certain URL.



NodeJS Express Server

```
1 import express from 'express';
2
3 const app = express();
4 const port = 3000;
5
6 app.use(express.text());
7
8 app.get('/potatotheory', (req, res) => {
9   const name = req.query.name;
10  res.json({
11    "message": `Hi ${name}`,
12  });
13 });
14
15 app.post('/yuchao', (req, res) => {
16  res.json({
17    name: 'Yuchao!',
18  });
19 });
20
21 app.listen(port, () => {
22   console.log(`Listening on port ${port}`);
23 });
```

This line actually starts the server (on a particular port). It essentially runs an infinite loop so the program runs forever constantly waiting for new people to "access" it via a certain URL.

Let's take a step back to learn about what servers are used for.




An API (Application Programming Interface) refers to an interface exposed by a particular piece of software.

The most common usage of "API" is for Web APIs, which refer to a "contract" that a particular service provides. The interface of the service acts as a black box and indicates that for particular endpoints, and given particular input, the client can expect to receive particular output.



Web API

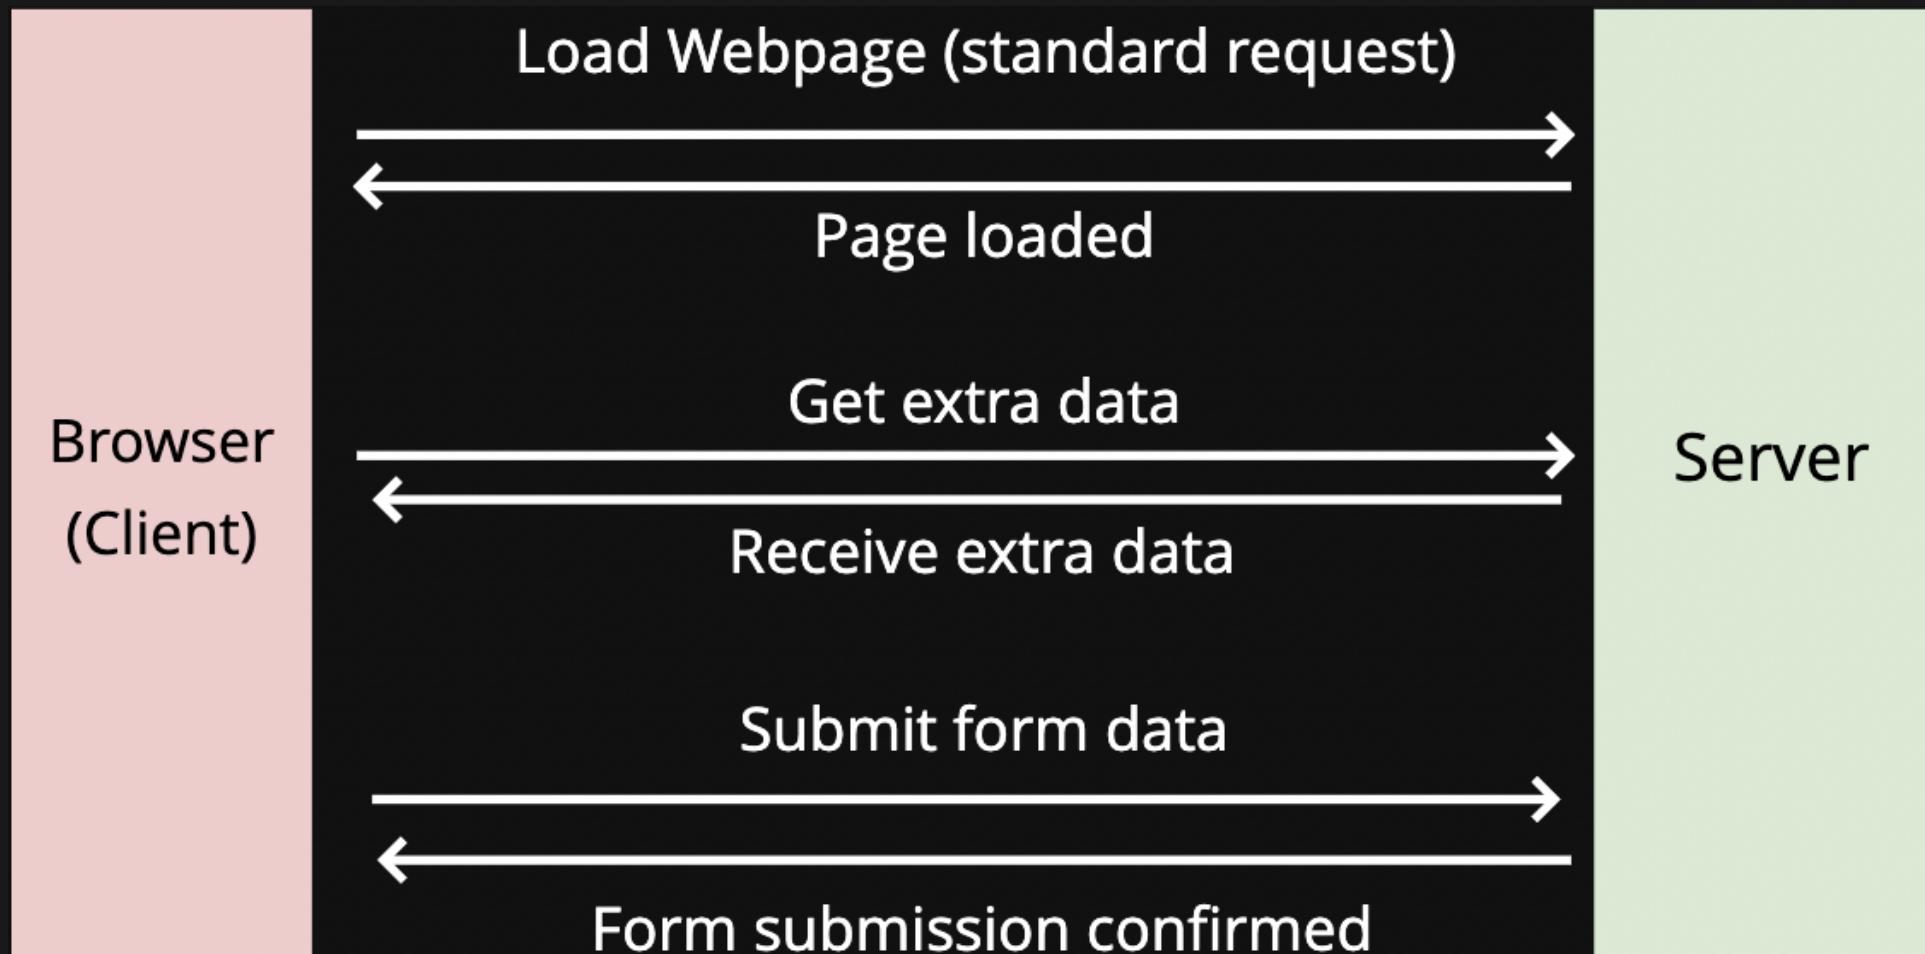



RESTful API

A RESTful API is an application program interface (API) that uses HTTP requests to GET, PUT, POST and DELETE data. These 4 methods describe the "nature" of different API requests.

GET, PUT, POST, DELETE are HTTP Methods. They refer to CRUD operations.

Method Operation

POST	Create
GET	Read
PUT	Update
DELETE	Delete



RESTful API

Different CRUD methods require different approaches for input. All output are the same.

```
1 import express from 'express';
2
3 const app = express();
4 const port = 3001;
5
6 app.use(express.text());
7
8 app.get('/apple', (req, res) => {
9   const name = req.query.name;
10  res.send(JSON.stringify({
11    msg: `Hi ${name}, thanks for sending apple!`,
12  }));
13 });
14
15 // same for .put and .delete
16 app.post('/orange', (req, res) => {
17   const body = JSON.parse(req.body);
18   const name = body.name;
19   res.send(JSON.stringify({
20     msg: `Hi ${name}, thanks for sending orange!`,
21   }));
22 });
23
24 app.listen(port, () => {
25   console.log(`Listening on port ${port}`);
26 });
```

4.2_crud.ts



RESTful API

Some methods of input work for all CRUD methods. Also, two routes can be the same name if they have different methods.

```
1 import express from 'express';
2
3 const app = express();
4 const port = 3001;
5
6 app.use(express.text());
7
8 app.get('/apple/:name', (req, res) => {
9   const name = req.params.name;
10  res.send(JSON.stringify({
11    msg: `Hi ${name}, thanks for sending apple!`,
12  }));
13 });
14
15 app.post('/apple/:name', (req, res) => {
16   const name = req.params.name;
17   res.send(JSON.stringify({
18     msg: `Hi ${name}, thanks for sending apple!`,
19   }));
20 });
21
22 app.listen(port, () => {
23   console.log(`Listening on port ${port}`);
24 });
```



RESTful API

Different CRUD properties require different approaches for input.

- For inputs:
 - GET|DELETE: either via
 - `req.query` (capture URL query string)
 - `req.params` (capture URL path variable)
 - PUT|POST: either via
 - `req.body` (capture body)
 - `req.params` (capture URL path variable)
- For outputs:
 - All outputs should be packaged up as JSON



RESTful API

If we are embrace the use of JSON everywhere, we can make use of other library feature to clean up the code.

```
1 import express from 'express';
2
3 const app = express();
4 const port = 3001;
5
6 app.use(express.json());
7
8 app.get('/apple', (req, res) => {
9   const name = req.query.name;
10  res.json({
11    msg: `Hi ${name}, thanks for sending apple!`,
12  });
13 });
14
15 // same for .put and .delete
16 app.post('/orange', (req, res) => {
17   const name = req.body.name;
18   res.json({
19     msg: `Hi ${name}, thanks for sending orange!`,
20   });
21 });
22
23 app.listen(port, () => {
24   console.log(`Listening on port ${port}`);
25 });
```



RESTful API

If we are embrace the use of JSON everywhere, we can make use of other library feature to clean up the code.

```
1 import express from 'express';
2
3 const app = express();
4 const port = 3001;
5
6 app.use(express.json());
7
8 app.get('/apple', (req, res) => {
9   const name = req.query.name;
10  res.json({
11    msg: `Hi ${name}, thanks for sending apple!`,
12  });
13 });
14
15 // same for .put and .delete
16 app.post('/orange', (req, res) => {
17   const name = req.body.name;
18   res.json({
19     msg: `Hi ${name}, thanks for sending orange!`,
20   });
21 });
22
23 app.listen(port, () => {
24   console.log(`Listening on port ${port}`);
25 });
```



RESTful API

Sometimes we put version numbers in our routes to help us keep track, e.g.:

- /v1/names/list
- /v2/names/list
- /v3/names/list

You will work with this principle in your major project.



RESTful API

Task

Create a web server that uses CRUD to allow you to create, update, read, and delete a point via HTTP requests

Use a global variable to manage the state.



Returning Errors

Restful APIs can also return errors:

```
1 import express from 'express';
2
3 const app = express();
4 const port = 3001;
5
6 app.use(express.text());
7
8 app.get('/apple/:name', (req, res) => {
9   const name = req.params.name;
10  if (name === 'Hayden') {
11    res.status(400).json({
12      error: 'Bad name',
13    });
14  } else {
15    res.json({
16      msg: `Hi ${name}, thanks for sending apple!`,
17    });
18  }
19 });
20
21 app.listen(port, () => {
22   console.log(`Listening on port ${port}`);
23 });
```

4.2_error.ts



Talking To A Web Server

How can we talk to a web server as a client?

1. API client
2. Web Browser
3. An NPM library: sync-requests



API Client (ARC, Postman)

How to download/install ARC:

- Open google chrome
- Google "ARC client"
- Install the addon and open it
- Follow the demo in the lectures

You may need to use a tool like this in the final exam.



API Client (ARC, Postman)

≡ ARC

Request

HTTP request

Method: GET Request URL: An URL is required.

Socket

History

Send a request and recall it from here

Once you made a request it will appear in this place.

Saved

Save a request and recall it from here

Use **ctrl+s** to save a request. It will appear in this place.

Install new ARC with new features!

Selected environment: Default

SEND

Variables

Headers

Header name Header value

ADD HEADER

A Headers are valid Headers size: bytes



Web Browser

The screenshot shows a browser window with the URL `127.0.0.1:5000/hello`. The browser's title bar also displays `127.0.0.1:5000/hello`. The main content area says "Hello World!". Below the content, the browser's developer tools Network tab is open, showing a single request named "hello".

Name: hello

General

- Request URL: `http://127.0.0.1:5000/hello`
- Request Method: GET
- Status Code: 200 OK
- Remote Address: 127.0.0.1:5000
- Referrer Policy: no-referrer-when-downgrade

Response Headers

- Content-Length: 12
- Content-Type: text/html; charset=utf-8
- Date: Wed, 09 Oct 2019 13:26:05 GMT
- Server: Werkzeug/0.16.0 Python/3.5.3

Request Headers

- Accept: `text/html,application/xhtml+xml,application/xml;q=0.9,image/webp,image/apng,*/*;q=0.8,application/signed-exchange;v=b3`
- Accept-Encoding: gzip, deflate, br
- Accept-Language: en-GB,en-US;q=0.9,en;q=0.8
- Cache-Control: max-age=0

1 requests | 166 B transferred



Requests Library

We can use an npm package sync-requests to allow us to programmatically send RESTful API requests. `npm install sync-requests`.

We can send them to our previous server.

```
1 import request from 'sync-request';
2
3 const res = request(
4   'GET',
5   'http://localhost:3001/apple',
6   {
7     qs: {
8       name: 'Hayden',
9     }
10  }
11 );
12
13 console.log(JSON.parse(String(res.getBody())));
```

4.2_requests.ts



Requests Library

We can use an npm package sync-requests to allow us to programmatically send RESTful API requests. `npm install sync-requests`.

We can send them to our previous server.

```
1 import request from 'sync-request';
2
3 const res = request(
4   'GET',
5   'http://localhost:3001/apple',
6   {
7     qs: {
8       name: 'Hayden',
9     }
10  }
11 );
12
13 console.log(JSON.parse(String(res.getBody())));
```

4.2_requests.ts

Let's look at the sync-request library to see if we can remove name=Hayden from URL.



Working With jest

```
1 import request from 'sync-request';
2
3 function get(route: string, qs: any) {
4   const res = request(
5     'GET',
6     `http://localhost:3001${route}`,
7     {
8       qs: qs,
9     }
10   );
11   return JSON.parse(String(res.getBody()));
12 }
13
14 describe('Test Apple', () => {
15   test('If it returns a name string successfully', () => {
16     const bodyObj = get('/apple', {
17       name: 'Hayden',
18     });
19     expect(bodyObj.msg).toBe('Hi Hayden, thanks for sending apple!');
20   });
21 });
22 describe('Test Orange', () => {
23   test('If it returns a name string successfully', () => {
24     const res = request(
25       'POST',
26       'http://localhost:3001/orange',
27       {
28         json: { name: 'Hayden' },
29       }
30     );
31     const bodyObj = JSON.parse(String(res.getBody()));
32     expect(bodyObj.msg).toBe('Hi Hayden, thanks for sending orange!');
33   });
34 });
```




How To Wrap Into Project

In general, iteration 2 requires that you implement an HTTP server. However! Many of the routes that exist in iteration 2 are just wrappers of your iteration 1 functions.

Therefore it should be easy to "wrap" your iteration 1 functions with an HTTP server. I.E. Most of the "server" stuff you'll do is just routing, gathering bodies, and returning responses, while treating your iteration 1 functions like blackboxes.



Optional! Making Life Easier.

Did you know we can make node auto restart if new files are compiled?

If we:

- Run `npm install --save-dev nodemon`
- Replace `node` with `nodemon` in `package.json`

Then run `npm run start` in a separate terminal.



Optional! Making Life Easier.

Did you know we can make tsc auto run if source files are changed?

If we:

- Add `--watch` flag to tsc command

Then run `npm run tsc` in a separate terminal.



Feedback



Or go to the [form here](#).

